

LED Flexible Light Strip

SMD3528 60LEDs/meter

Features

Features 3528SMD high powered LEDs delivering up to **1,860 lumens**

12 VDC/24VDC operating voltage

Available in Black and White finish options

LED Light Strip features **adhesive backing** & **cuttable 3-LED/6-LED segments** for easy installation

180° optics improve visibility with wider area illumination

Applications include back lighting, task lighting, cove lighting, retail, sign illumination, under cabinet, display case, accent decor, and automotive accents

Standards and Certifications

CE ,Rohs, ETL certification ,3years warranty



Accessories



Remote Dimmers & Switches



Strip Interconnects



Mounting Hardware & Extrusions



Power Supplies


General Product Specifications

Beam Angle	180 Degree	Type	Flexible Light Strips
LED Type	3528 SMD	Color	11 Different Color Options
Voltage	12 V/24V DC	Life Span	≥30,000 Hrs
LEDs Per Segment	3/6	Strip Width	10.15mm
Lumens (Max)	1860	Strip Finish	White / Black
Water Resistance	Non-Weatherproof	Strip Length	0.5m / 1m / 5m
Polarized	Yes	Strip Connection	Connector / No Connector

Product Specifications

	Emitting Color	Wavelength	Intensity Per Foot	Power Consumption
<input type="checkbox"/>	Cool White	9900 K	95 lm/ft	80 mA (1 W)
	Natural White	4500 K	114 lm/ft	89 mA (1.1 W)
	Warm White	3300 K	114 lm/ft	80 mA (1 W)
	Ultra Warm White	2500 K	114 lm/ft	80 mA (1 W)
	UV	405 nm	10973 mcd/ft	67 mA (0.8 W)
	Pink	440 nm	20117 mcd/ft	86 mA (1 W)
	Blue	470 nm	16459 mcd/ft	67 mA (0.8 W)
	Green	525 nm	21946 mcd/ft	61 mA (0.7 W)
	Yellow	590 nm	18288 mcd/ft	91 mA (1.1 W)
	Amber	610 nm	18288 mcd/ft	91 mA (1.1 W)
<input type="checkbox"/>	Red	626 nm	18288 mcd/ft	91 mA (1.1 W)

Dimensions

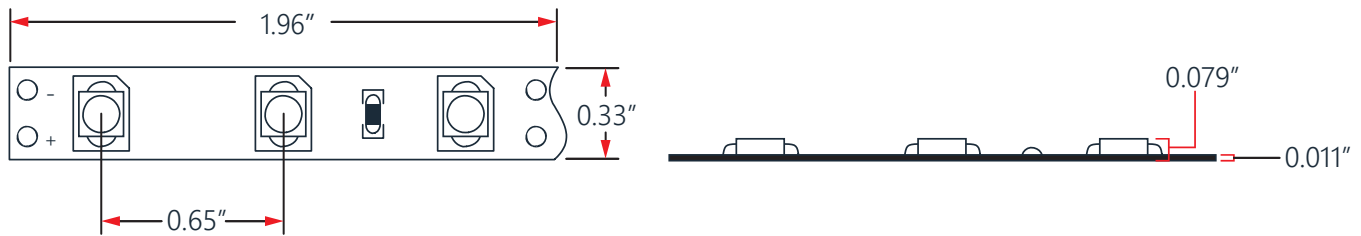

Maximum Flexibility Precaution

